


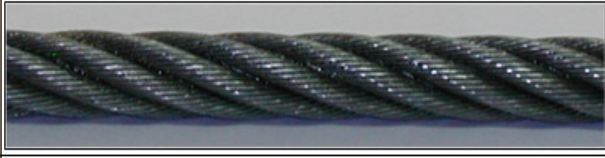





E. Attachment

The following Standard Operating Procedures (SOP) are the standard that we already applied for Nyrosten T55 grease and black grease.

SOP 1 :

Standard of Grease Type

QC Team

Grease Type		Sample of Grease Type	Remark
Yellowish Grease (Nyrosten T55)	A-1		Apply between the wires with the very minimum grease
	A-2		Apply more heavier than the A-1 grease
	A-3		Apply with full and perfectly close between wires
	A-4		Apply with the perfectly between the wires and strand
Black Grease	B		Half apply between wires
	C		Apply with full and perfectly close between wires
	D		Apply with the perfectly between the wires and strand (very thick)